

KALINGA

TOP BRAND



PRODUCT CATALOGUE



Who We Are..

City beautifying is an important way to improve the quality of life of the residents, to improve the investment environment of the city, to promote the popularity and reputation of the city and to build to brand of the city. In the hot construction and reconstruction of towns and cities, commercial lighting undoubtedly plays an important role. and it has become the trend of city beautifying to return to nature, to get closer to nature and to advocate environmental protection.

KALINGA LIGHTING advocates the healthy consuming philosophy of "environmental protection and returning to nature". We blend modern lighting technology with Eastern traditional aesthetics, dedicated to create the harmony of light and environment, the unity of nature and humanity, to create comfortable, harmonious, modern and fashionable city life. When night falls, everywhere is resplendent and brilliant, colorful and lively. Walking on the path of the yard, we see dots of light setting off the wonderful artificial sights excelling nature, and the changing architectural arts as well. The lights are sometimes soft and weak, peaceful and harmonious, sometimes strong and colorful, vivid and bright. Wandering among them is so pleasing and intoxicating. Lamp is the perfect combination of idea and conception, of dream power and creative wisdom. It lets us feel the unique brilliance of life, the vividness and elegance of streamlined shapes; it integrates ergonomics and the overall design, gives full consideration to the demand of human body, and it integrates in the unique view on living space. It creates a fascinating free space, which is the perfect combination of technology and arts, which is filled with harmonious aesthetic feelings.

We have entered a new century. As economy develops and the society advances, international lighting industry has had rapid development. People's demand for lighting products are getting higher and higher *KALINGALIGHTING*. In early 2000, the company made the goal of building a network brand in the lighting industry. Now the company is integrating channel resources in a planned way, building a highly efficient marketing network platform with network service as core, quality products as foundation, information and technology as support, providing distributors and end-users with affordable but excellent energy-saving lighting products, as well as "in-time, professional and friendly" individualized services that aim at increasing value of customers and bringing them excellent feeling. We keep providing customers with efficient, comfortable, safe and environment-friendly lighting products.

TRACK LIGHTS

KALINGA
TOP BRAND



Model No. KI-862

Watt	: 10w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated
Color	: Black & White



Model No. KI-10/20/30

Watt	: 10w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

Model No. KI-1098

Watt	: 10w, 20w, 30w
Beam Angle	: >36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



TRACK LIGHTS

KALINGA
TOP BRAND



Model No. KI-1099

Watt	: 10w, 20w, 30w
Beam Angle	: > 15°-60°
LED Lumen/Watt	: > 130-140
Efficiency	: > 85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: > 0.95 THD < 20%
Protections	: Surge upto 2.5 KV True-Isolated



Model No. KI-501

Watt	: 10w, 20w, 30w
Beam Angle	: > 60°
LED Lumen/Watt	: > 130-140
Efficiency	: > 85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: > 0.95 THD < 20%
Protections	: Surge upto 2.5 KV True-Isolated

Model No. KI-V6

Watt	: 6w
Beam Angle	: > 45°
LED Lumen/Watt	: > 130-140
Efficiency	: > 85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: > 0.95 THD < 20%
Protections	: Surge upto 2.5 KV True-Isolated



LED Track Spot Light

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-6004-30w	145x50x85x120	2700	0.95	80	3000K, 4000K, 6500K
KI-6004-45w	122x48x115x104	4400	0.95	80	3000K, 4000K, 6500K

TRACK LIGHTS

KALINGA
TOP BRAND



Model No. KI-Liner TR

Watt	: 12w, 18w, 30w
Beam Angle	: >48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



Model No. KI-2046

Watt	: 20w, 30w
Beam Angle	: >36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



Model No. KI-135

Watt	: 3w, 6w, 9w, 16w, 30w, 50w
Beam Angle	: >36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC ~47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



LED Track Spot Light KI-870

Model No.	Dimension	PF	CRI	CCT
KI-11214-20w Trackspot	160x100x170	0.95	80	3000K, 4000K, 6500K
KI-11214-30w Trackspot	160x100x170	0.95	80	3000K, 4000K, 6500K
KI-11214-35w Trackspot	160x100x170	0.95	80	3000K, 4000K, 6500K
KI-11214-40w Trackspot	160x100x170	0.95	80	3000K, 4000K, 6500K

COB DOWN LIGHTS



KI-2011

Watt	: 7w, 12w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



KI-DLZ

Watt	: 10w, 20w, 30w
Beam Angle	: >15°-60°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

KALINGA TOP BRAND



KI-2026

Watt	: 7w, 12w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

COB DOWN LIGHTS

KALINGA
TOP BRAND



KI-2022

Watt	: 5w, 7w, 12w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volta AC ~ 47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



KI-335

Watt	: 3w, 8w, 9w, 16w, 24w, 30w, 50w
Beam Angle	: >24° / 36° / 48° / 60°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volta AC ~ 47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



KI-DBR

Watt	: 10w, 20w, 30w
Beam Angle	: >15°-60°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volta AC ~ 47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



LED Spot Light - COB Downlight

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-2021-15w	135x65	110mm	1400	0.95	80	3000K, 4000K, 6500K
KI-2021-22w	135x65	110mm	1700	0.95	80	3000K, 4000K, 6500K
KI-2021-35w	165x65	150mm	2800	0.95	80	3000K, 4000K, 6500K
KI-2022-15w	130x130x65	110x110mm	1400	0.95	80	3000K, 4000K, 6500K
KI-2022-22w	130x130x65	110x110mm	1700	0.95	80	3000K, 4000K, 6500K
KI-2022-35w	165x165x65	150x150mm	2800	0.95	80	3000K, 4000K, 6500K

COB DOWN LIGHTS

KALINGA
TOP BRAND



KI-DL07

Watt	: 7w, 12w, 20w, 30w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC -47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



KI-L-1005/L-1004

Watt	: 7w, 12w, 15w
Beam Angle	: >24° / 36° / 48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC -47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

KI-5004

Watt	: 5w, 12w, 18w
Beam Angle	: >48°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC -47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



COB DOWN LIGHTS

KALINGA
TOP BRAND



REAR VIEW



GOLDEN
REFLECTOR



CHROME
REFLECTOR



COPPER
REFLECTOR



TOP VIEW



REAR VIEW

Oreo COB Spot Light

Model No.	Watt	Outer	Cutout	Height	Beam Angle
KI-LORE10R	10	80mm	70mm	45mm	45°
KI-LORE15R	15	100mm	85mm	45mm	45°

COMPACT SIZE ANTIGLARE DOWNLIGHT
LOW HEIGHT COB DOWNLIGHT
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
BEAM ANGLE 45°
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
ALUMINIUM DIE-CAST MATERIAL
COLOR AVAILABLE : WH/WW/NWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :



Oreo COB Spot Light

Model No.	Watt	Outer	Cutout	Height	Beam Angle
KI-LORD10R	10	80mm	70mm	45mm	45°
KI-LORD15R	15	100mm	85mm	55mm	45°
KI-LORD20R	20	110mm	100mm	55mm	45°

GIMBAL DOWN LIGHTS



Model No. KI-GB25, KI-GB30

Wattage	:	25W, 30W
Height	:	96mm
Cutout	:	156x156mm
LED	:	Philips / Cree / Bridgelux
Driver	:	Philips / Fulham / Osram
Reflector	:	Darkoo
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
Led Beam Angle	:	24° / 36° / 60°

Model No. KI-GB50, KI-GB60

Wattage	:	25x25W, 30x30W
Height	:	98mm
Cutout	:	156x309mm
LED	:	Philips / Cree / Bridgelux
Driver	:	Philips / Fulham / Osram
Reflector	:	Darkoo
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
Led Beam Angle	:	24° / 36° / 60°
Body Colour	:	White / Black

CEILING RECESSED SPOT LIGHTS

KALINGA
TOP BRAND



LED Spot Light - Decorative Reflector

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-901/902 8w	80x90mm	70mm	700	0.95	80	3000K, 4000K, 6500K
KI-901/902 13w	80x115mm	70mm	1100	0.95	80	3000K, 4000K, 6500K



LED Spot Light - Colorful Permium Series

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-1011-9w	100x70mm	70mm	700	0.95	80	3000K, 4000K, 6500K
KI-1011-13w	100x60mm	70mm	1100	0.95	80	3000K, 4000K, 6500K



LED Spot Light - KI-135

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-135-L-1-8w	100x100x80	85x85mm	760	0.95	80	3000K, 4000K, 6500K
KI-135-L-2-16w	100x185x80	85x170mm	1520	0.95	80	3000K, 4000K, 6500K



LED Spot Light - KI-136

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-136-L-1-8w	100x100x80	85x85mm	760	0.95	80	3000K, 4000K, 6500K
KI-136-L-1-13w	100x185x80	85x170mm	1230	0.95	80	3000K, 4000K, 6500K
KI-136-L-2-16w	100x185x80	85x170mm	1520	0.95	80	3000K, 4000K, 6500K
KI-136-L-2-26w	100x185x80	85x170mm	2470	0.95	80	3000K, 4000K, 6500K

MODULAR LED LIGHTS

KALINGA
TOP BRAND



LED Spot Light - KI-8003

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-8003-8w Lamp	50x55mm	880	0.95	80	3000K, 4000K, 6500K
KI-8003-13w Lamp	50x75mm	1320	0.95	80	3000K, 4000K, 6500K
KI-8003-30w-QR-111	111x80mm	3000	0.95	90	3000K, 4000K, 6500K



LED Spot Light - Logo Lamp

Model No.	Dimension	Cutting	PF	CRI	CCT
KI-JG05-10w	43x80	75mm	0.95	80	3000K, 4000K, 6500K



LED Spot Light - Logo Lamp

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-2 Head Stand Light	200mm	160	0.05	80	3000K, 4000K, 6500K
KI-3 Head Stand Light	250mm	240	0.05	80	3000K, 4000K, 6500K



LED Flexible Strip Light

LED Watt/Mtr	LED Qty/M	Colours	Packing	PCB Width	IP20/55
7w	60	WW	5 Mtr Per Roll	8mm	IP20/65
14w	120	WW		8mm	IP20/65
14w	60	WW		8mm	IP20/65
14w	120	WW		10mm	IP20/65
22w	240	WW		10mm	IP20/65
14w	60	RGB		10mm	IP20/65

** Also Available in All Colour.*



CEILING RECESSED WALL WASHERS

KALINGA
TOP BRAND



LED Spot Light - Golden Series

Model No.	Dimension	Cutting	PF	CRI	CCT
KI-11092-L-1x15w	100x105	90mm	0.95	80	3000K, 4000K, 6500K
KI-11093-L-2x15w	200x105	90x190mm	0.95	80	3000K, 4000K, 6500K
KI-11094-L-1x30w	128x128	105mm	0.95	80	3000K, 4000K, 6500K
KI-11095-L-2x30w	256x128	105x210	0.95	80	3000K, 4000K, 6500K



LED Zoom Lights

Watt	Output Lumen	Outer Dia	Cut Out
10w	>1000	110mm	95mm
20w	>2000	155mm	135mm
30w	>3000	190mm	170mm

COB Spot Lights

Details	1w Round	1w Square	3w Round	3w Square	3w Surface Round	3w Surface Square	5w Round	5w Square
Voltage	Voltage AC 220-240V / 50HZ							
Lumen Flux	100	100	300	300	300	300	500	500
Cut Size	37mm	27mm	35mm	35mm	-	-	27mm	57mm
Size	31mm	30x30mm	41mm	40x40mm	65mm	60x60mm	65mm	60x60mm



LED Spot Light - Golden Series

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-398-8w	95xH-120	87mm	1000	0.95	80	3000K, 4000K, 6500K



LED RECESSED DOWNLIGHTS

KALINGA
TOP BRAND



LED Slim Panel Light

Watt	: 5w, 7w, 12w, 12w, 18w, 30w
Beam Angle	: >120°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

LED Surface Panel Light

Watt	: 5w, 7w, 12w, 18w, 24w,30w
Beam Angle	: >120°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



LED Grid Ceiling Panles

Watt	: 36w, 42w, 48w
Beam Angle	: >120°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW 4000K CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC —47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated

CEILING RECESSED SPOT LIGHTS

KALINGA
TOP BRAND



LED Spot Light - KI-1002

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-1002-L-1-8w	100x100x95	85x85mm	760	0.95	80	3000K, 4000K, 6500K
KI-1002-L-1-13w	100x100x130	85x85mm	1230	0.95	80	3000K, 4000K, 6500K
KI-1002-L-2-16w	100x185x95	85x170mm	1520	0.95	80	3000K, 4000K, 6500K
KI-1002-L-2-26w	100x185x130	85x170mm	2470	0.95	80	3000K, 4000K, 6500K
KI-1002S-L-1-8w	85x85x90	75x75mm	760	0.95	80	3000K, 4000K, 6500K
KI-1002S-L-1-13w	85x85x115	75x75mm	1230	0.95	80	3000K, 4000K, 6500K



LED Spot Light - Rimless Series

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-313-15w	95x95	95mm	1500	0.95	80	3000K, 4000K, 6500K
KI-321-15w	90x90xH80	90x90mm	1500	0.95	80	3000K, 4000K, 6500K



COB Spot LED Lights KI-235

Watt	Output Lumen	Outer Dia	Cut Out
3-5w	>100 LM/W	53mm	40mm
7-9w	>100 LM/W	88mm	70mm
12w	>100 LM/W	110mm	86mm
18w	>100 LM/W	138mm	110mm
25w	>100 LM/W	160mm	134mm
36w	>100 LM/W	200mm	170mm
45w	>100 LM/W	210mm	175mm

SURFACE MOUNTED LIGHTS

KALINGA
TOP BRAND



Model No. KI-863

Watt	: 7w, 12w, 20w, 30w
Beam Angle	: >36° / 48° / 60°
LED Lumen/Watt	: >130-140
Efficiency	: >85%
Material Type	: Pressure Die cast Al with soft diffuser
LED Colors	: WW (3000K) NW (4000K) CW (5700K-6500K)
Input Range	: 85 volt AC - 300 volts AC -47-60 Hz
Power Factor	: >0.95 THD <20%
Protections	: Surge upto 2.5 KV True-Isolated



COB Surface KI-3600 Adjustable

Model No.	Watt	Input Volt.	Outer Size	COB Size	Material	CCT	Beam Angle
COBSURFACE20ADJ	20w	90-265V	110x95mm	11mm	Aluminum	2700-6500	24°
COBSURFACE20ADJ	30w	90-265V	115x110mm	17mm	Aluminum	2700-6500	24°



COB Surface KI-1501

Model No.	Watt	Input Volt.	Outer Size	COB Size	Material	CCT	Beam Angle
COBSURFACE05	5w	90-265V	60x76mm	11mm	Aluminum	2700-6500	24°
COBSURFACE10	10w	90-265V	75x100mm	11mm	Aluminum	2700-6500	24°
COBSURFACE20	20w	90-265V	100x100mm	11mm	Aluminum	2700-6500	30°
COBSURFACE30	30w	90-265V	120x120mm	17mm	Aluminum	2700-6500	30°

SURFACE MOUNTED LIGHTS

KALINGA
TOP BRAND



LED Spot Light - Surface Series

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-3003-8w	60x106	700	0.95	80	3000K, 4000K, 6500K
KI-3003-8w-8"	60x196	700	0.95	80	3000K, 4000K, 6500K
KI-3003-13w-5"	70x118	1300	0.95	80	3000K, 4000K, 6500K
KI-3003-13w-9"	70x218	1300	0.95	80	3000K, 4000K, 6500K
KI-3003-20w-6"	100x148	2000	0.95	80	3000K, 4000K, 6500K
KI-3003-20w-9"	100x218	2000	0.95	80	3000K, 4000K, 6500K
KI-3003-30w	120x175	3000	0.95	80	3000K, 4000K, 6500K
KI-3003-45w	140x175	4000	0.95	80	3000K, 4000K, 6500K

LED Spot Light - Surface Series

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-3008-13w	95x95x110	960	0.95	80	3000K, 4000K, 6500K
KI-3008-20w	115x115x125	1800	0.95	80	3000K, 4000K, 6500K
KI-3008-30w	120x120x175	3000	0.95	80	3000K, 4000K, 6500K

LED Surface Spot Light

Model No.	Dimension	Lumens	PF	CRI	CCT
KI-2109-13w SPOT	175	1300	0.95	80	3000K, 4000K, 6500K



RECESSED LINEAR LIGHT



LED Spot Light - Linear Series

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-401-L-1-3w	45x45xH-49	37x37	500	0.9	80	3000K, 4000K, 6500K
KI-401-L-2-5w	75x45x49	68x39	600	0.9	80	3000K, 4000K, 6500K
KI-401-L-5-13w	147x45x49	140x37	1440	0.95	80	3000K, 4000K, 6500K
KI-401-L-10-25w	280x45x49	237x37	2750	0.95	80	3000K, 4000K, 6500K
KI-401-L-15-35w	415x45xH-49	405x37	3600	0.95	80	3000K, 4000K, 6500K



LED Spot Light - Linear Trimless Series

Model No.	Dimension	Cutting	Lumens	PF	CRI	CCT
KI-501-L-2-5w	65x35xH49	72x42mm	600	0.9	80	3000K, 4000K, 6500K
KI-501-L-5-13w	138x35xH49	144x42mm	1440	0.9	80	3000K, 4000K, 6500K
KI-501-L-10-25w	270x35xH49	277x42mm	2750	0.95	80	3000K, 4000K, 6500K



KALINGA
TOP BRAND



MAGIC SQUARE

EMITTING ANGLE



WALL WASHER

KALINGA
TOP BRAND



LED Linea Wall Washer

Model	Watt	Outer	Cut Out	Height
KI-LLNWW12	12w	146x44mm	137x35	40
KI-LLNWW29	20w	281x44mm	271x35	40

Linea Diffused X

Model	Watt	Outer	Cut Out	Height	Beam Angle
KI-LLN12DX	12w	146x44mm	137x35	40	80°
KI-LLN20DX	20w	281x44mm	271x35	40	80°

Linea Diffused

Model	Watt	Outer	Cut Out	Height	Beam Angle
KI-LLN12DIF	12w	146x44mm	137x35	40	80°
KI-LLN20DIF	20w	281x44mm	271x35	40	80°

Material : Aluminium
Colour Temperature : 3000K, 4000K, 6500K
CRI : 80

Model	Watt	Beam Angle	Light Output	Height
KI-LLN12DIF	12W	30°/36°	1000lm	140mm
KI-LLN20DIF	20W	30°/36°	2212lm	140mm

ALUMINIUM DIE-CAST MATERIAL
INDOOR RECESSED LIGHTING
BRANDED LED USED CRI>80;140LM/W
BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
USED AS WALL WASHER LIGHTING
CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
COLOR AVAILABLE : WH/WW/WWH
PROTECTION RATING: IP20
FINISH AVAILABLE : PKW & BK

Control Type :




LINEAR PROFILE LIGHTS

KALINGA
TOP BRAND

3382











5070

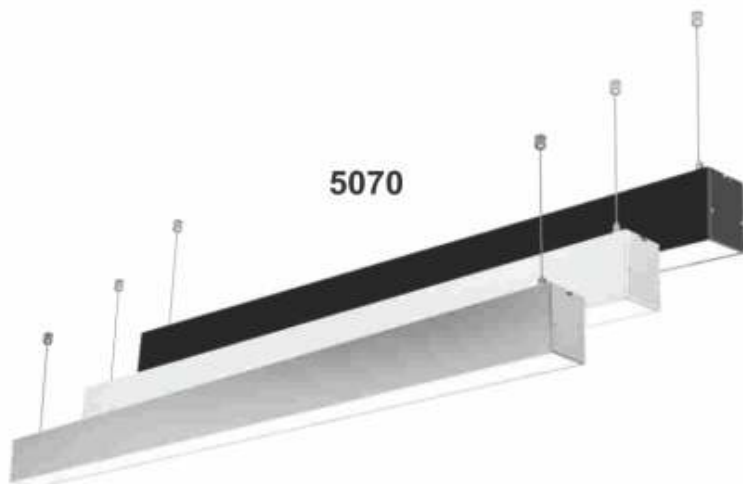

**CONCEALED
PROFILE**

3250



						
						
						
Model : KI-LP3020A Size : Lx44x20mm PCB : 2 x 10-12mm	Model : KI-LP3020 Size : Lx30x20mm PCB : 2 x 10-12mm	Model : KI-LP508 Size : Lx24.7x7mm PCB : 12mm	Model : KI-LP509 Size : Lx17.4x7mm PCB : 12mm	Model : KI-LP601 Size : Lx15.8x15.8mm PCB : 10mm	Model : KI-LP613 Size : Lx17.2x14.4mm PCB : 12mm	Model : KI-LP613B Size : Lx24x14.2mm PCB : 12mm

LINEAR PROFILE LIGHTS

KALINGA
TOP BRAND



Architectural Light

LED Lumen/Watt	> 100
Efficiency	> 85%
Warranty	2 Years
Material Type	AL. housing with Fiber glass reinforced plastic
LED make & CRI	Edison 2835 with CRI > 80
LED Colour	WW 3000K, NW 4000K, CW 5700-6500K
Input Range	85V AC 300V ~47-60HZ
Power Factor	> 0.95, THD < 15%
Protections	Surge upto 2.5KV, High Voltage cut-off, Isolated


WEATHER PROOF



Model No. KI-DS2/DS4 - T5/T8 / KI-FL06 T5/T8

Wattage	: 12-18W, 24-36W
LED	: Osram / Bridgelux
LED Type	: LED Module / T8
Driver	: Philips / Fulham / Osram
Material	: Polycarbonate Moulded
Colour Temp.	: 3000K, 4000K, 6500K
DS2 Dimensions	: L x W x H 590x65x71
DS4 Dimensions	: L x W x H 1190x65x71
Dimensions	: 1195x145.0x81mm HT



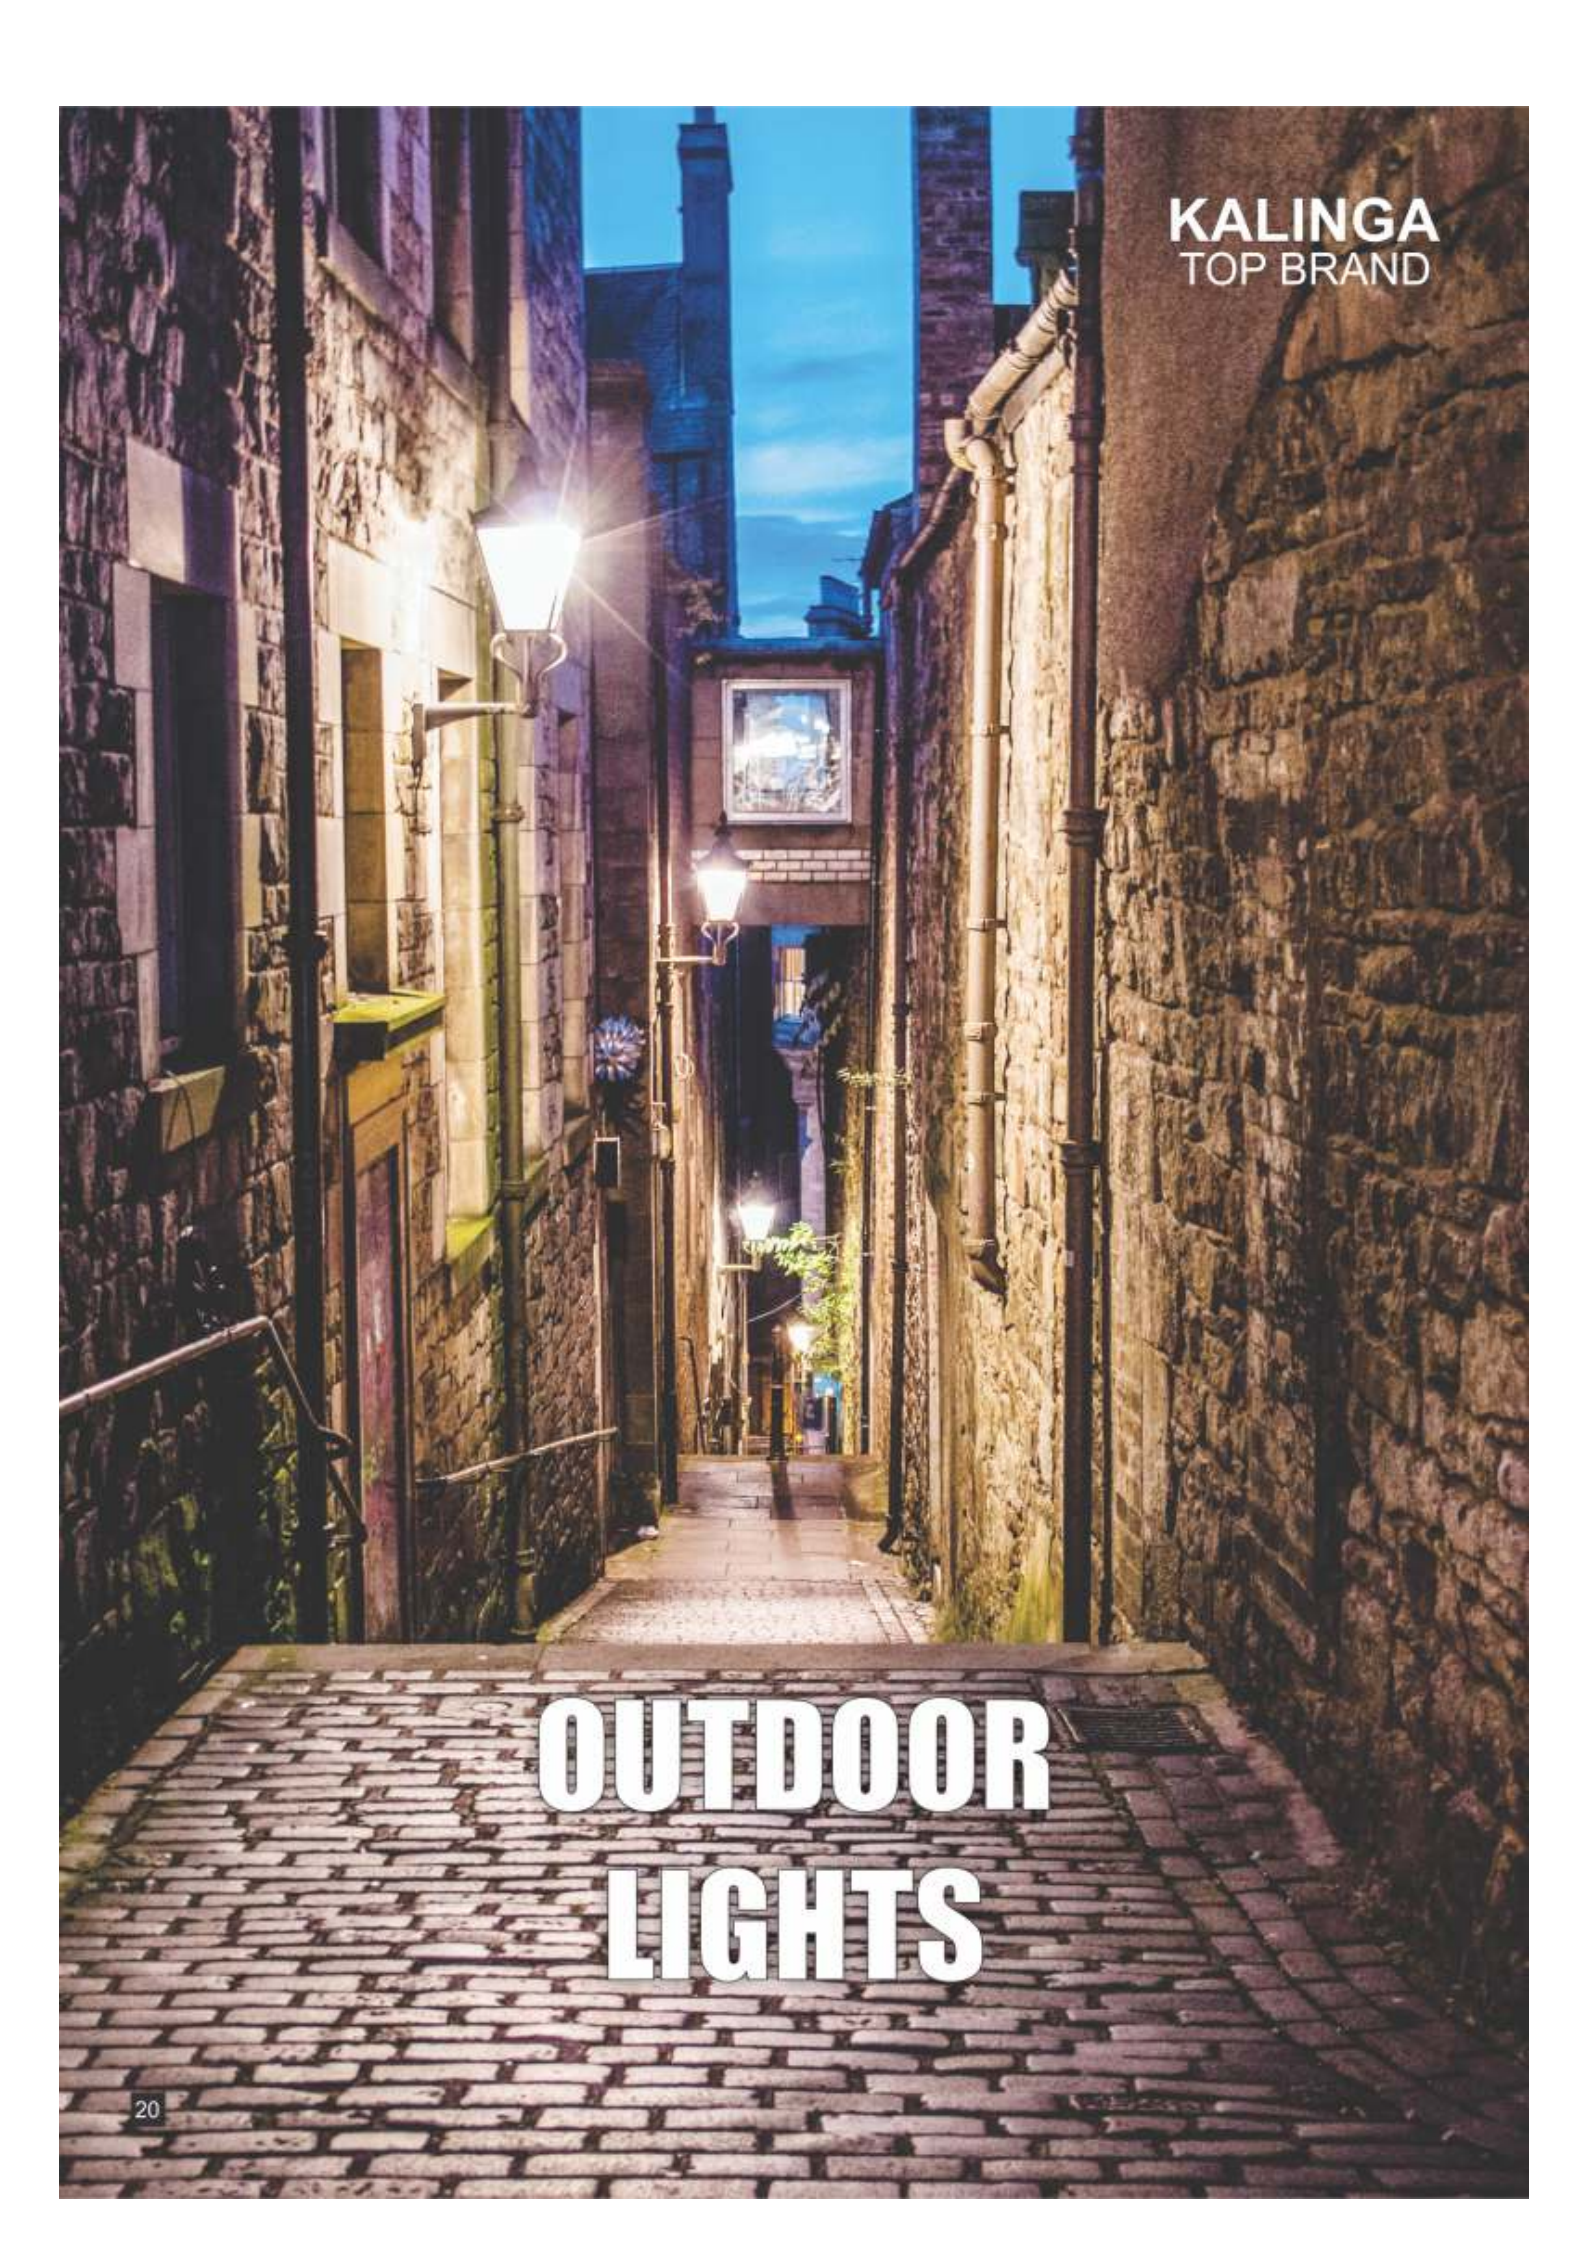

KALINGA
TOP BRAND

OUTDOOR LIGHTS

FLOOD LIGHTS

KALINGA
TOP BRAND



LED Flood Light

Model No.	Watt	Input Volt.	LED	No. of LED	Lumens*	Size (mm)
FLNEW30	30w	90-265V	3030 1w	32	3000	230x188x120
FLNEW50	50w	90-265V	3030 1w	54	5000	287x235x140
FLNEW100	100w	90-265V	3030 1w	108	10000	290x265x150
FLNEW150	150w	90-265V	3030 1w	162	15000	390x290x125
FLNEW200	200w	90-265V	3030 1w	216	20000	412x370x135



LED Flood Light KI-FLD3200


Watt	Dimension (mm)	Output Lumen	Weight
30w	184x180x47	>3000	0.9kg
50w	220x225x50	>5000	1.5kg
100w	275x285x65	>10000	2.8kg
150w	300x285x75	>15000	3.5kg
200w	355x270x85	>20000	4.8kg

LED STREET LIGHTS

KALINGA
TOP BRAND

Street Lights KI-STR3240

Watt	Output Lumen	Dimension	Pole
30w	>3000	40mm	365mm
50w	>5000	51mm	435mm
72w	>7200	58mm	435mm
100w	>10000	58mm	535mm
150w	>15000	58mm	535mm
200w	>20000	58mm	540mm
240w	>24000	58mm	540mm

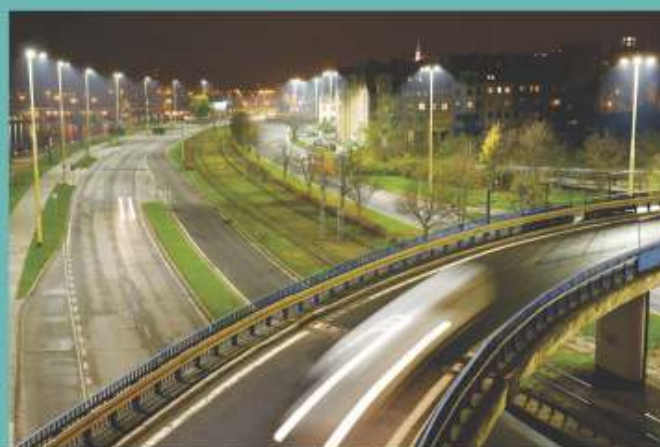

LED Street Light (Slim Model)

Model No.	Watt	LED	No. of LED	Lumens*	Size (mm)	Pole Size
KISLIM20	20w	3030 1w	20	2000	281x115x35	40-60mm
KISLIM30	30w	3030 1w	30	3000	308x125x45	40-60mm
KISLIM50	50w	3030 1w	50	5000	400x140x45	40-60mm
KISLIM100	100w	3030 1w	100	10000	530x185x50	40-60mm



LED Street Light (Dolphin Model)

Model No.	Watt	LED	No. of LED	Lumens*	Size (mm)	Pole Size
KINEW30	30w	3030 1w	32	3000	350x180x60	40mm
KINEW50	50w	3030 1w	54	5000	500x220x70	50mm
KINEW100	100w	3030 1w	108	10000	720x280x85	60mm
KINEW150	150w	3030 1w	162	15000	880x350x95	60mm
KINEW200	200w	3030 1w	216	20000	950x350x95	60mm



LED LOW/ MEDIUM HIGH BAY LIGHTS



KALINGA
TOP BRAND

LED High Bay Light (Traditional Style)

Model No.	Watt	Input Volt.	LED	No. of LED	Lumens*	Size (mm)	Dome
HBNEW50	50w	90-265V	3030 1w	60	5000	450x320	90°-120°
HBNEW100	100w	90-265V	3030 1w	120	10000	450x320	90°-120°
HBNEW150	150w	90-265V	3030 1w	180	15000	450x320	90°-120°
HBNEW180	180w	90-265V	3030 1w	180	18000	450x320	90°-120°

LED High Bay Light (UFO Style)

Model No.	Watt	Input Volt.	LED	No. of LED	Lumens*	Size (mm)	Dome
UFO100	100w	90-265V	3030 1w	140	10000	315x150	120°
UFO150	150w	90-265V	3030 1w	210	15000	330x170	120°
UFO200	200w	90-265V	3030 1w	280	20000	455x220	120°

Linear Wall Washer

Model No.	Watt	Model No.	Watt	Model No.	Watt
KI-WW-001A	3w	KI-WW-005A	18w	KI-WW-009A	42w
KI-WW-002A	6w	KI-WW-006A	24w	KI-WW-010A	48w
KI-WW-003A	9w	KI-WW-007A	30w	KI-WW-011A	60w
KI-WW-004A	12w	KI-WW-008A	36w		

Color Temperature : 3000K, 4000K, 6500K / RGB




OUTDOOR LED WALL LIGHTS

KALINGA
TOP BRAND



KI-8091

LED	:	2x3w, 2x5 (COB), 1x3w, 1x5w (COB)
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with Toughened Glass
Body Color	:	Graphite Gray



KI-234

LED	:	2x8w, 2x6w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with Toughened Glass
Body Color	:	Graphite Gray




KI-233

LED	:	2x6w, 2x3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray



KI-2509

LED	:	4x3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with Toughened Glass
Body Color	:	Graphite Gray



KI-7020

LED	:	4x3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with Acrylic Lens
Body Color	:	Graphite Gray




OUTDOOR LED WALL LIGHTS

KALINGA
TOP BRAND



KI-7010

LED	: 2x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Lens
Body Color	: Graphite Gray, PKW




KI-6060

LED	: 3x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Lens
Body Color	: Graphite Gray



KI-2054

LED	: 2x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray



KI-188 Wall Light

LED	: 6w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray





OUTDOOR LED WALL LIGHTS

KALINGA
TOP BRAND



KI-246

LED	2x1w, 4x1w, 6x1w
LED Color	Red, Green, Blue, Yellow
Material	Die Casting Aluminium with Acrylic Lens
Body Color	Graphite Gray

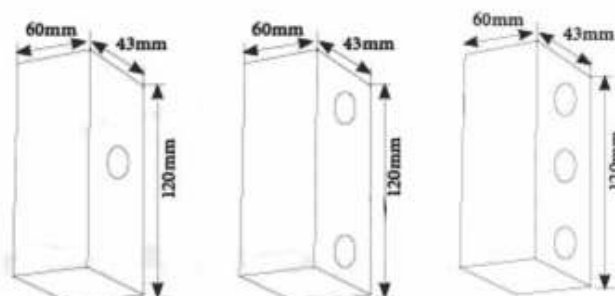

KI-1033


LED	6w
Color Temperature	3000K, 6000K
Material	Die Casting Aluminium with PC Diffuser
Body Color	Graphite Gray

KI-8910

LED	12w
Color Temperature	3000K, 6000K
Material	Die Casting Aluminium with PC Diffuser
Body Color	Graphite Gray


OUTDOOR LED WALL LIGHTS

KALINGA
TOP BRAND

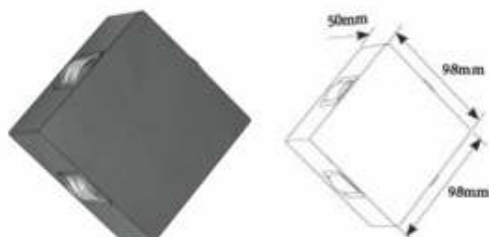


KI-2004 Square Lens

LED	: 1x3w, 2x3w, 3x3w, 4x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Square Lens
Body Color	: Graphite Gray

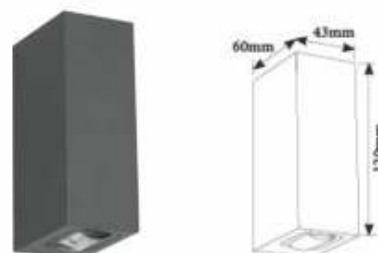


KI-4002 Square Lens

LED	: 2x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Square Lens
Body Color	: Graphite Gray

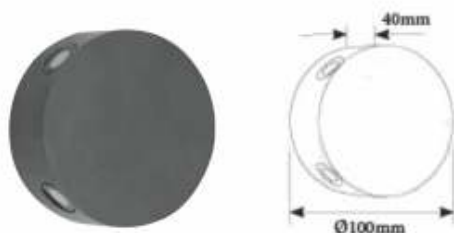


KI-4004

LED	: 4x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray

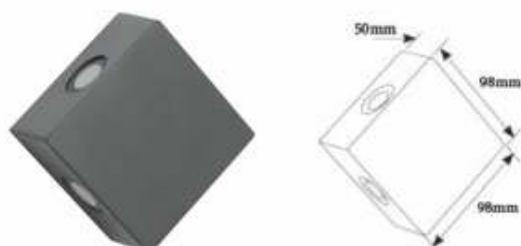

KI-2004 Round Lens



LED	: 1x3w, 2x3w, 3x3w, 4x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray

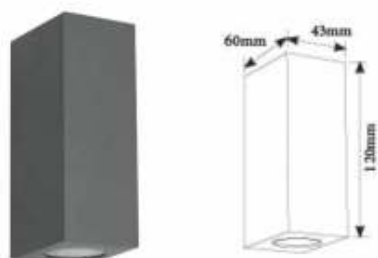

KI-4002 Round Lens



LED	: 2x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray

OUTDOOR LED WALL LIGHTS





KI-881-2 Square /Round

LED	: 2x5w COB
Holder	: 2xGU-10
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray



KI-881-1 Square /Round

LED	: 1x5w COB
Holder	: 1xGU-10
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray



KI-880 Surface Square /Round

LED	: 1x5w COB
Holder	: 1xGU-10
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray

KALINGA
TOP BRAND



OUTDOOR LED WALL LIGHTS

KALINGA
TOP BRAND




KI-16-19

LED	: 2x12w COB
Holder	: 2xE-27
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Black




KI-1046

LED	: 1x12w COB
Holder	: 1xE-27
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Black

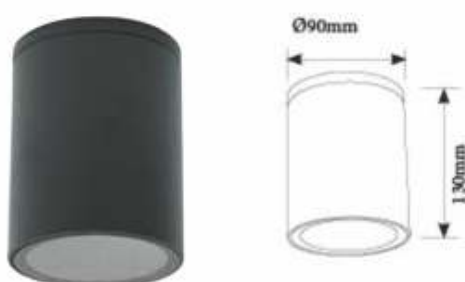


KI-1046 Surface

LED	: 1x12w COB
Holder	: 1xE-27
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Black

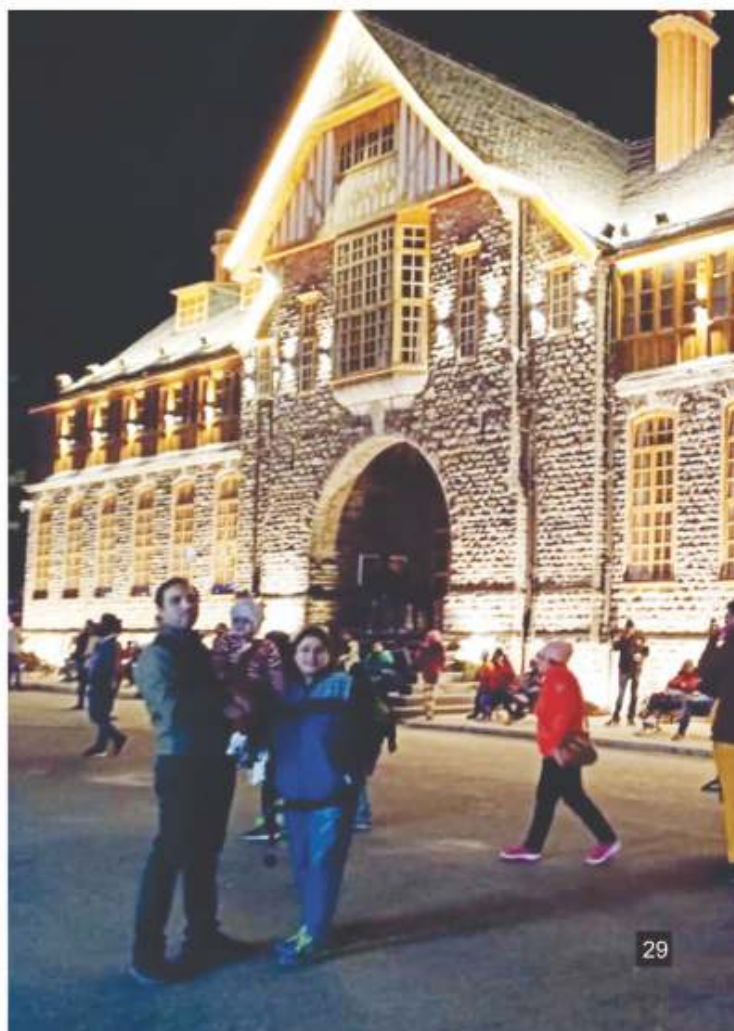




OUTDOOR LED STEP LIGHTS

KALINGA
TOP BRAND

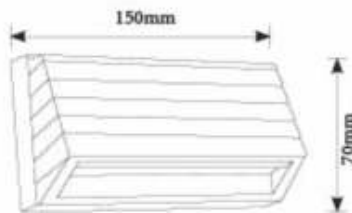

KI-8080

LED	:	8w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray





KI-33

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray



OUTDOOR LED STEP LIGHTS

KALINGA
TOP BRAND



KI-990 Square / Round

LED	: 3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray





KI-2911

LED	: 3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

KI-9306


LED	: 6w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray



KI-8401 Square / Round


LED	: 1x3w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

INDOOR LED FOOT LIGHTS




KI-26A

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	White




KI-26B

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	White




KI-26C

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	White



KI-26 Square

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	White



KI-26 Round

LED	:	3w
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	White

OUTDOOR LIGHTS

KALINGA
TOP BRAND



KI-177 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : 2xE-27



KI-199 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : E-27



KI-177 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : 2xE-27



KI-199 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : E-27



KI-177 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : E-27




KI-199 Bollard

Material : Die Casting Aluminium with
PC Diffuser
Body Color : Graphite Gray
Holder : E-27

OUTDOOR LIGHTS

KALINGA
TOP BRAND

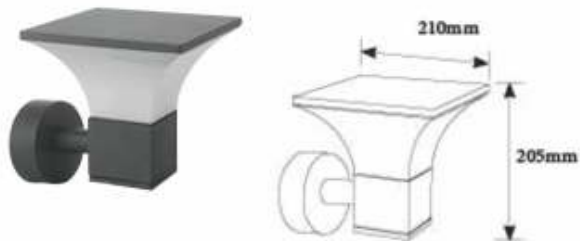

KI-270 Square Wall / Gate Light

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27




KI-270 Square Bollard

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27



OUTDOOR LIGHTS

KALINGA
TOP BRAND

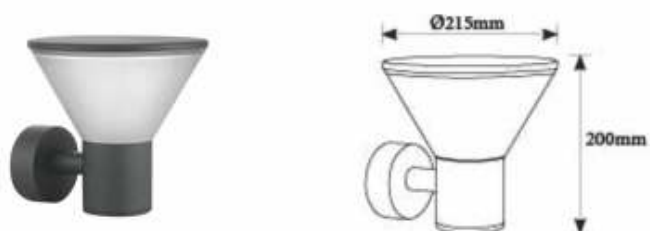

KI-270 Round Wall / Gate Light

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27



KI-270 Round Bollard

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27



KI-7299 Wall / Gate Light

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27

OUTDOOR LIGHTS

KALINGA
TOP BRAND




KI-7299 Bollard

Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray
Holder	: E-27



KI-7080 Bollard

LED	: 12w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

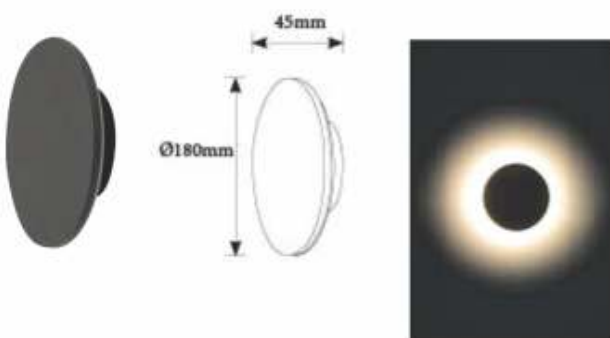

KI-7080 Wall Light

LED	: 12w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

OUTDOOR LIGHTS

KALINGA
TOP BRAND




KI-888 Wall Light

LED	: 9w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray



KI-888 Bollard

LED	: 9w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

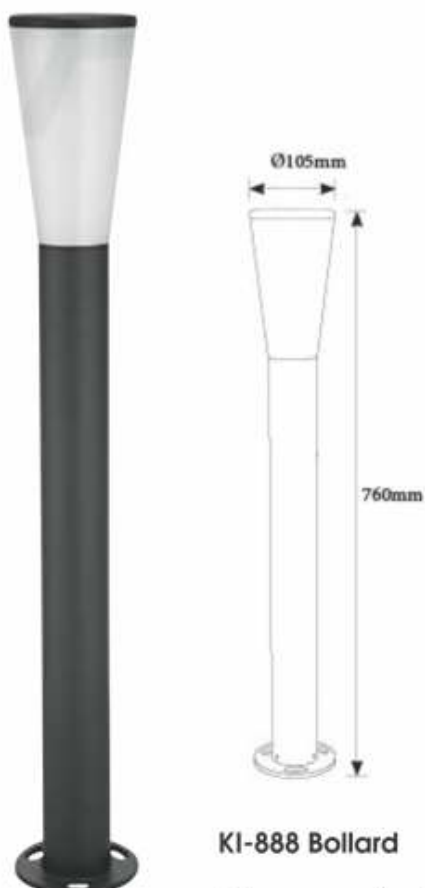

KI-888 Bollard

LED	: 9w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray



KI-888 Bollard

LED	: 9w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with PC Diffuser
Body Color	: Graphite Gray

OUTDOOR LIGHTS

KALINGA
TOP BRAND



KI-188 Bollard

LED	:	6W
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray



KI-188 Bollard


LED	:	12W
Color Temperature	:	3000K, 6000K
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray

LED POLE LIGHTS



KI-83038 Round

LED	:	50w & 80W
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray

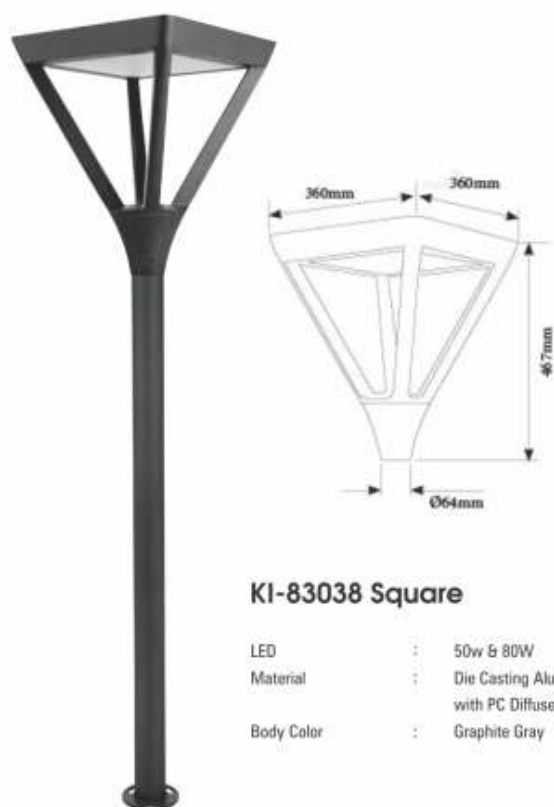

KI-83038 Square

LED	:	50w & 80W
Material	:	Die Casting Aluminium with PC Diffuser
Body Color	:	Graphite Gray

KALINGA
TOP BRAND



POST TOP LIGHT



KALINGA TOP BRAND

Model No. KI-050

Wattage	:	50W, 60W
LED	:	Bridgelux
Driver	:	Philips / Fulham / Osram
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
IP Rating	:	IP 65
Size	:	580x320x65mm

Model No. KI-030

Wattage	:	50W, 60W
LED	:	Bridgelux
Driver	:	Philips / Fulham / Osram
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
IP Rating	:	IP 65
Size	:	440x440mm

Model No. KI-040

Wattage	:	100W, 160W
LED	:	Bridgelux
Driver	:	Philips / Fulham / Osram
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
IP Rating	:	IP 65
Size	:	560x65mm

Model No. KI-040

Wattage	:	100W, 160W
LED	:	Bridgelux
Driver	:	Philips / Fulham / Osram
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
IP Rating	:	IP 65
Size	:	560x65mm

Model No. KI-020

Wattage	:	50W, 60W
LED	:	Bridgelux
Driver	:	Philips / Fulham / Osram
Colour Temp.	:	3000K, 4000K, 6500K
Lumen Efficiency	:	130 LM/W
IP Rating	:	IP 65
Size	:	450x450x65mm

POST TOP LIGHT



Model No. KI-POST

Wattage	: 33W
LED Source	: Philips Module
Colour Temp.	: 3000K, 4000K, 6500K
Lumen Efficiency	: 130 LM/W
IP Rating	: IP 65
Size	: 535x745mm



Model No. KI-080

Wattage	: 50W
LED	: Bridgelux
Driver	: Philips / Fulham / Osram
Colour Temp.	: 3000K, 4000K, 6500K
Lumen Efficiency	: 130 LM/W
IP Rating	: IP 65
Size	: 560x360x300mm



Model No. KI-Antilla

Wattage	: 110W
LED	: Philips Module
Driver	: Philips / Fulham / Osram
Colour Temp.	: 3000K, 4000K, 6500K
Lumen Efficiency	: 130 LM/W
IP Rating	: IP 65
Size	: 450x450x65mm



Model No. KI-011

Wattage	: 150W
LED	: Bridgelux / Philips / Osram
Driver	: Philips / Fulham / Osram
Colour Temp.	: 3000K, 4000K, 6500K
Lumen Efficiency	: 130 LM/W
IP Rating	: IP 65
Size	: 600x300mm



Model No. KI-090

Wattage	: 100W
LED	: Bridgelux / Philips / Osram
Driver	: Philips / Fulham / Osram
Colour Temp.	: 3000K, 4000K, 6500K
Lumen Efficiency	: 130 LM/W
IP Rating	: IP 65
Size	: 550x360x300mm

OUTDOOR LIGHTS

KALINGA
TOP BRAND



(mm)	Small	Medium	Big
Height	350	385	500
Width	195	220	265
P.Ø	50	60	75

KI-999 Gate Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big



(mm)	Small	Medium	Big
Height	350	385	500
Width	195	220	265

KI-999 Wall Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big



(mm)	Small	Big
Height	400	520
Width	205	295
P.Ø	60	75

KI-201 Gate Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big



(mm)	Small	Big
Height	390	510
Width	205	295

KI-201 Wall Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big



(mm)	Small	Big
Height	230	390
Width	140	180
P.Ø	50	60

KI-444 Gate Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big



(mm)	Small	Big
Height	240	380
Width	140	180

KI-444 Wall Light

Material : Die Casting Aluminium with Frosted Glass
 Body Color : Black
 Holder : B-22
 Size : Small, Medium, Big

OUTDOOR LIGHTS

KALINGA
TOP BRAND



(mm)	Small	Medium	Big
Height	320	440	675
Width	210	260	320

KI-501 Gate Light

Material : Die Casting Aluminium with Frosted Glass
Body Color : Black
Holder : B-22
Size : Small, Medium, Big



(mm)	Small	Medium	Big
Height	320	395	580
Width	210	260	320

KI-501 Wall Light

Material : Die Casting Aluminium with Frosted Glass
Body Color : Black
Holder : B-22
Size : Small, Medium, Big



(mm)	Small	Medium	Big
Height	355	430	585
Width	155	190	265
P.Ø	50	60	75

KI-301 Gate Light

Material : Die Casting Aluminium with Frosted Glass
Body Color : Black
Holder : B-22
Size : Small, Medium, Big



(mm)	Small	Medium	Big
Height	355	420	580
Width	155	190	265

KI-301 Wall Light

Material : Die Casting Aluminium with Frosted Glass
Body Color : Black
Holder : B-22
Size : Small, Medium, Big



(mm)	Dimension
Height	320
Width	155
P.Ø	50

KI-7072 Gate Light


Material : Die Casting Aluminium with Frosted Glass
Body Color : Black
Holder : E-27



KI-7072 Wall Light

Material : Die Casting Aluminium with Frosted Glass
Body Color : Antique
Holder : E-27


GARDEN LIGHTS

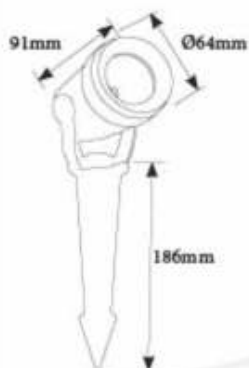

KI-5100 - Spike


LED : 7W COB
Material : Die Casting Aluminium
with Toughened Glass
Body Color : Graphite Gray

KALINGA TOP BRAND

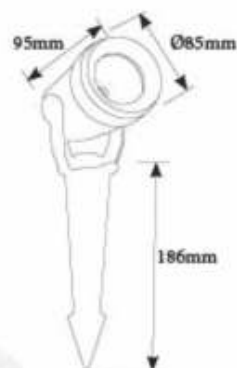

KI-5100 - Spike

LED : 12W COB
Material : Die Casting Aluminium
with Toughened Glass
Body Color : Graphite Gray

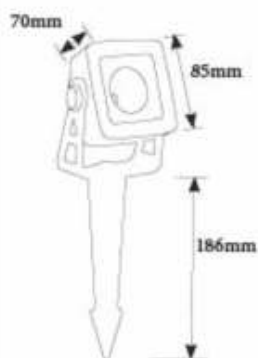

KI-4040 - Spike

LED : 7W COB
Material : Die Casting Aluminium
with Toughened Glass
Body Color : Graphite Gray



KI-4048 - Spike

Material : Die Casting Aluminium
with Toughened Glass
Body Color : Graphite Gray
Holder : E-27

GARDEN LIGHTS

KALINGA
TOP BRAND



KI-4095 - Spike

LED	: 5W COB
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray
Holder	: GU-10, MR-16



KI-4095 - Wall Light

LED	: 5W COB
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray
Holder	: GU-10, MR-16



KI-4095 - Spike with Cap

LED	: 5W COB
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray
Holder	: GU-10, MR-16



KI-4095 - Wall Light with Cap

LED	: 5W COB
Material	: Die Casting Aluminium with Toughened Glass
Body Color	: Graphite Gray
Holder	: GU-10, MR-16


INGROUND LED LIGHTS

KALINGA
TOP BRAND



KI-4050

LED : 1x1w
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Graphite Gray

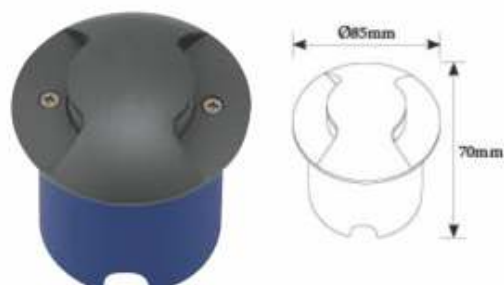

KI-4050

LED : 2x1w
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Graphite Gray



KI-4050

LED : 3x1w
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Graphite Gray



KI-4050

LED : 4x1w
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Graphite Gray



KI-5050

LED : 7w COB
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Silver Finish




KI-5050

LED : 12w COB
Color Temperature : 3000K, 6000K
Material : Die Casting Aluminium with PC Diffuser
Body Color : Silver Finish


OUTDOOR LIGHTS

KALINGA
TOP BRAND



KI-360 Track Light

LED	: 9w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Lens
Body Color	: Graphite Gray, White



KI-180 Track Light

LED	: 6w
Color Temperature	: 3000K, 6000K
Material	: Die Casting Aluminium with Acrylic Lens
Body Color	: Graphite Gray, White



KI-Prisma Vertical A

Material	: Die Casting Aluminium with Frosted Glass
Body Color	: Black
Holder	: B-22



KI-Prisma Vertical B

Material	: Die Casting Aluminium with Frosted Glass
Body Color	: Black
Holder	: B-22



KI-Prisma Horizontal A

Material	: Die Casting Aluminium with Frosted Glass
Body Color	: Black
Holder	: B-22




KI-Prisma Horizontal B

Material	: Die Casting Aluminium with Frosted Glass
Body Color	: Black
Holder	: B-22

OUTDOOR LIGHTS

KALINGA
TOP BRAND



Model LBD0260-6
Power 6W
Material PC
Size 220x112x50mm

Model LBD2020-12x
Power 12W
Material Alluminium



6125- 6W



459 - 2x5W
459 - 5W



8832 - 2x5W



9818 - 6W



9818 - 6W



78003 - 2
78003 - 8



76120 - 6





OUR CLIENTS

KALINGA TOP BRAND

KALINGA INTERNATIONAL

5/1 & 5/7, Patel Nagar (West)

New Delhi - 110008

Phone No. - +91-11-47588888

E-mail - kalingalight@gmail.com

Website - www.kalingalighting.com



Save Environment
Save Earth

Follow us: KALINGA LIGHT

